

MK-22D13-GXXX

侧拨形式



G-SWITCH P/N

G020=2.0mm


G025=2.5mm

G030=3.0mm

G040=4.0mm

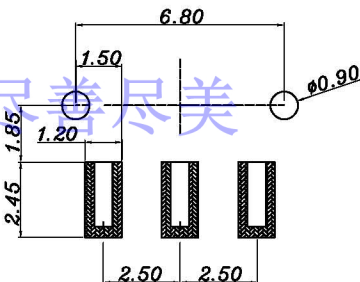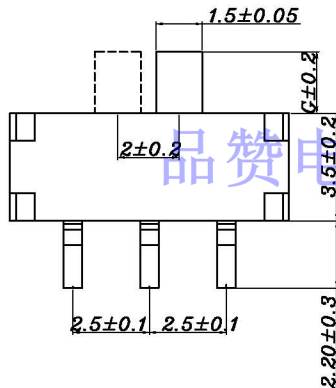

PCB PLERTING PLAN



CIRCUIT DIAGRAM



RoHS
Compliant
2002/95/EC



Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN 陈伟祺 DATE 2016.05.29
CHECKED DATE
APPROVED DATE
<http://www.dg-switch.com>
TEL:0769-82388879

TITLE:
MK-22D13-GXXX
REV.: X1 SCALE: 4:1 UNIT: mm
SIZE: A4 SHEET: 1/1

G-Switch:
使用温度范围: -20~70℃
耐压: AC250V 50Hz 1min
额定负荷: DC 12V 0.5A
操作力: 200g±100gf
接触电阻: ≤0.05Ω
动作寿命: 10000次
绝缘电阻: ≥100MΩ