

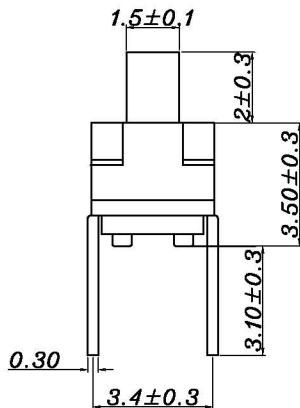
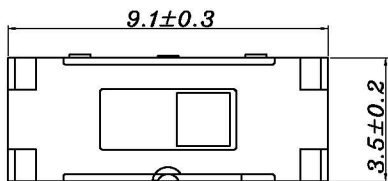




MS-12D16-GXXX


直接形式
G-SWITCH P/N

G020=2.0mm
G025=2.5mm
G030=3.0mm
G040=4.0mm

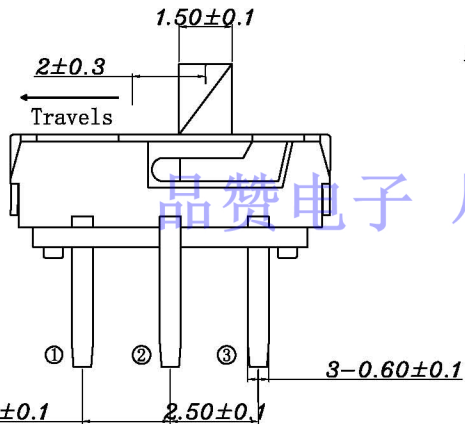

PCB PLERING PLAN

G-Switch:
使用温度范围: -20~70℃
耐压: AC250V 50Hz 1min
额定负荷: DC 12V 0.5A
操作力: 200g±100gf
接触电阻: ≤0.05Ω
动作寿命: 10000次
绝缘电阻: ≥100MΩ



CIRCUIT DIAGRAM



b-Switch			G-Switch Electronic Technology CO.,Ltd.		
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN	陈伟祺	DATE	2016.05.29	TITLE: MS-12D16-GXXX REV.: X1 SCALE: 4:1 UNIT: mm SIZE: A4 SHEET: 1/1
	CHECKED		DATE		
	APPROVED		DATE		
	http://www.dg-switch.com TEL:0769-82388879				