

MS-22C01-GXXX



直拔形式

G-SWITCH P/N


G010=1.0mm

G015=1.5mm

G020=2.0mm

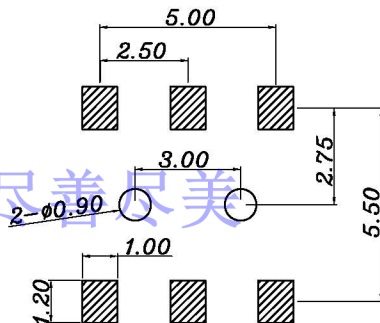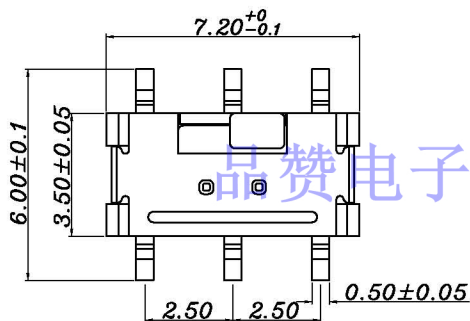

PCB PLERTING PLAN



CIRCUIT DIAGRAM



RoHS
Compliant
2002/95/EC



b-Switch

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN 陈伟祺 DATE 2016.05.29
CHECKED DATE
APPROVED DATE
<http://www.dg-switch.com>
TEL:0769-82388879

TITLE:
MS-22C01-GXXX
REV.: X1 SCALE: 4:1 UNIT: mm
SIZE: A4 SHEET: 1/1

G-Switch:

使用温度范围: -20~70℃

耐压: AC250V 50Hz 1min

额定负荷: DC 12V 0.5A

操作力: 200g±100gf

接触电阻: ≤0.05Ω

动作寿命: 10000次

绝缘电阻: ≥100MΩ