
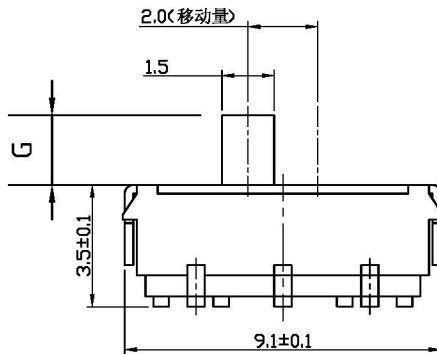




MS-22D17-GXXX

直拨形式



G-SWITCH P/N

G020=2.0mm


G025=2.5mm

G030=3.0mm

G040=4.0mm

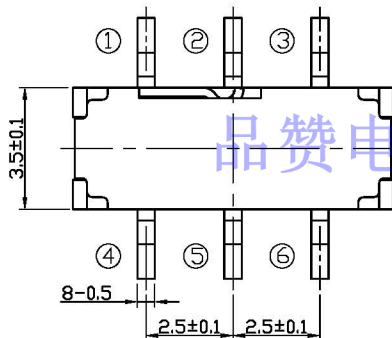

CIRCUIT DIAGRAM

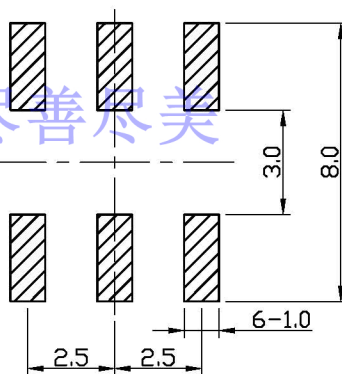

P.C.B LAND DIMENSION

G-Switch:

使用温度范围: -20~70℃

耐压: AC250V 50Hz 1min

额定负荷: DC 12V 0.5A

操作力: 200g±100gf

接触电阻: ≤0.05Ω

动作寿命: 10000次

绝缘电阻: ≥100MΩ



RoHS
Compliant
2002/95/EC



b-Switch

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN 陈伟祺 DATE 2016.05.29
CHECKED DATE
APPROVED DATE
<http://www.dg-switch.com>
TEL:0769-82388879

TITLE:
MS-22D17-GXXX
REV.: X1 SCALE: 4:1 UNIT: mm
SIZE: A4 SHEET: 1/1