

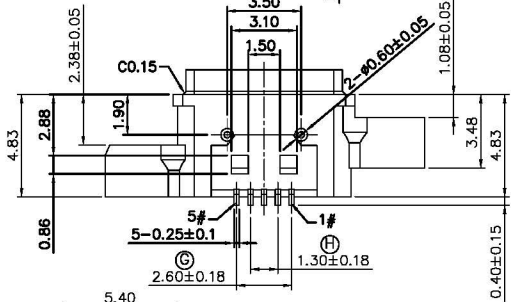


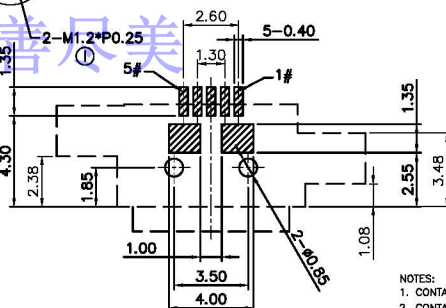

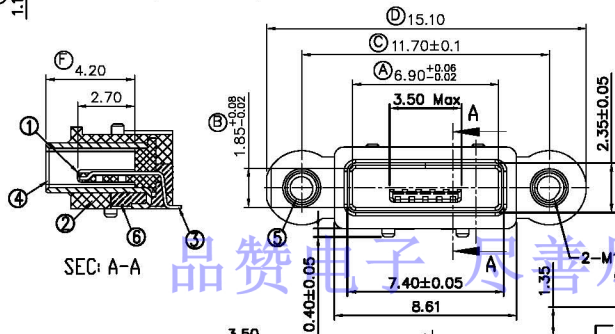





Recommended P.C.B. Layout
Unspecified tolerance: ± 0.05
(Top view)

- NOTES:
1. CONTACT CURRENT RATING: 1.0A(SIGNAL PIN2,3,4)/2.0A(POWER PIN1,5).
 2. CONTACT RESISTANCE: 30mΩ MAX.;
 3. INSULATION RESISTANCE: 1000MΩ MIN.;
 4. DIELECTRIC WITHSTANDING: 100V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 25N (2.55Kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 2~25N (0.20~2.55Kgf);

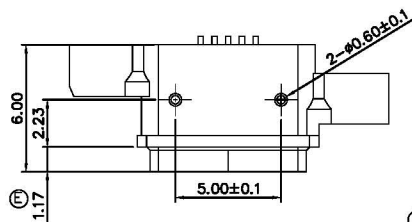

b-Switch

Unless otherwise specified, Tolerance:
X.X ±0.30
X.X ±0.20
X.X ±0.15
X.XXX ±0.10
Angles ±3°

G-Switch Electronic Technology CO., Ltd.

DESIGN 陈伟祺	DATE 2016.05.29	TITLE:
CHECKED	DATE	
APPROVED	DATE	
http://www.dg-switch.com		
TEL:0769-82388879		
REV.: X1	SCALE: 4:1	UNIT: mm
SIZE: A4	SHEET: 1/1	

GT-USB-6003