

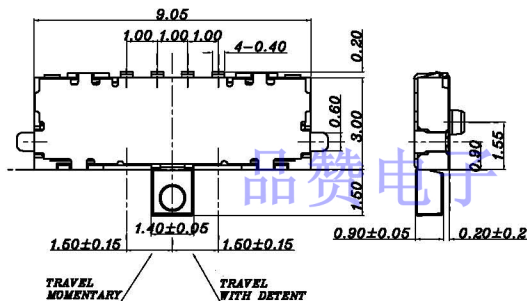


**CIRCUIT DIAGRAM
SEE DIRECTION**



CARRIER TAPE





MK-14C03-G015


侧拨形式
品赞系列编码

G015=1.5mm


REEL

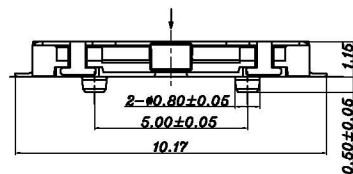

DETAIL OF A



COVER TAPE



G-Switch:

使用温度范围: -20~70℃
耐压: AC250V 50Hz 1min
额定负荷: DC 12V 0.5A
操作力: 200g±100gf
接触电阻: ≤0.05Ω
动作寿命: 10000次
绝缘电阻: ≥100MΩ



RoHS
Compliant
2002/95/EC



b-Switch

Unless otherwise specified, Tolerance:
X. ±0.30
X.X ±0.20
X.XX ±0.15
X.XXX ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN	陈伟帆	DATE	2016.05.29	TITLE:	
CHECKED		DATE			
APPROVED		DATE			
http://www.dg-switch.com				REV.: X1	SCALE: 4:1
TEL:0769-82388879				UNIT: mm	
				SHEET: 1/1	

MK-14C03-G015