



MK-42D10-GXXX

直接形式


G-SWITCH P/N

G020=2.0mm

G040=4.0mm

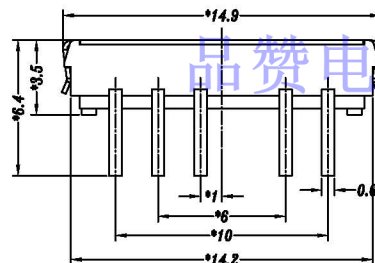

P.C.B LAYOUT



SCHEMATIC

NO.	PART NAME	MATERIAL	QTY	FINISHING
5	MK2402 TERMINAL	BRASS	1	Ag PLATED
4	MK22D10 SPRING	PBS φ0.25mm	2	WASHING
3	MK2402 CASE	PART	1	BLACK
2	MK2402 COVER	SUS	1	WASHING
1	MK2402 KNOB	PART/PA46	1	BLACK



RoHS
Compliant
2002/95/EC



Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN	陈伟枫	DATE	2016.05.29	TITLE:	
CHECKED		DATE			
APPROVED		DATE			
http://www.dg-switch.com				REV.: X1	SCALE: 4:1
TEL:0769-82388879				UNIT: mm	
SIZE: A4				SHEET: 1/1	

MK-42D10-GXXX

G-Switch:

使用温度范围: -20~70℃

耐压: AC250V 50Hz 1min

额定负荷: DC 12V 0.5A

操作力: 200g±100gf

接触电阻: ≤0.05Ω

动作寿命: 10000次

绝缘电阻: ≥100MΩ