



MS-12D08-GXXX

直接形式

G-SWITCH P/N

G017=1.7mm

G035=3.5mm

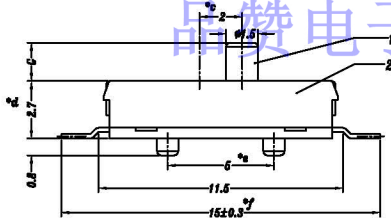

SCHEMATIC

G-Switch:

使用温度范围: -20~70℃

耐压: AC250V 50Hz 1min

额定负荷: DC 12V 0.5A

操作力: 50g±30gf

接触电阻: ≤0.05Ω

动作寿命: 10000次

绝缘电阻: ≥100MΩ

NO.	PART NAME	PART	MATERIAL	QTY	FINISHING
6	HOUSING	PART	1	BLACK	
4	CONTACT	PBS	1	Ag PLATED	
3	COVER	SUS	1	WASHING	
2	CASE	PART/BRASS	1	BLACK/Ag PLATED	
1	KNOB	PART	1	BLACK	



RoHS
Compliant
2002/95/EC



Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN	陈伟枫	DATE	2016.05.29	TITLE:	MS-12D08-GXXX
CHECKED		DATE			
APPROVED		DATE			
http://www.dg-switch.com				REV.: X1	SCALE: 4:1
TEL:0769-82388879				UNIT: mm	
				SHEET: 1/1	