
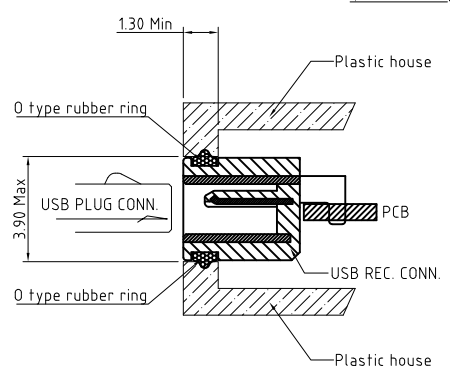


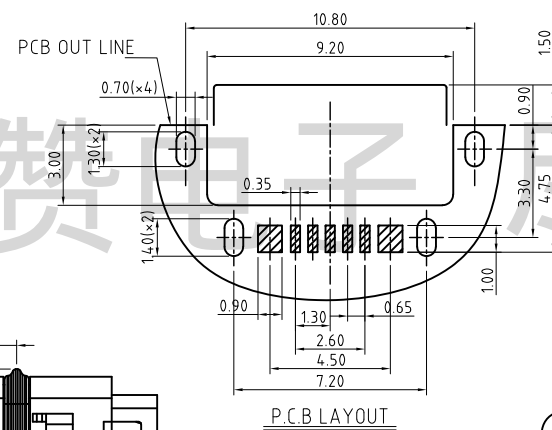
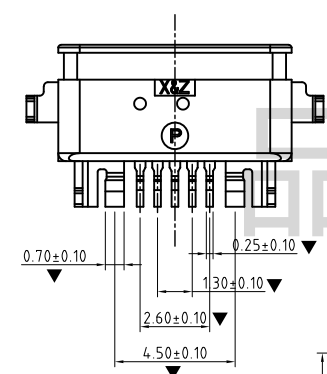

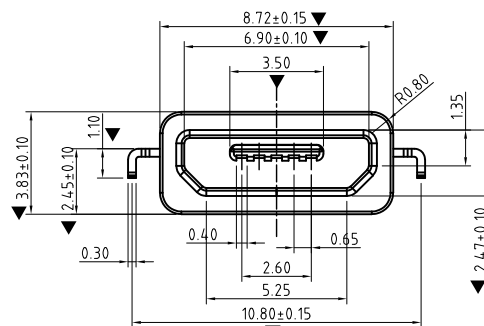


- NOTES:
1. CONTACT CURRENT RATING: 1.0A(SIGNAL PIN2,3,4);2.0A(POWER PIN1,5).
 2. CONTACT RESISTANCE: 30mΩ MAX.;
 3. INSULATION RESISTANCE: 1000MΩ MIN.;
 4. DIELECTRIC WITHSTANDING: 100V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 25N (2.55Kgf)MAX.;
 7. CONNECTOR UNMATING FORCES: 2~25N (0.20~2.55Kgf);

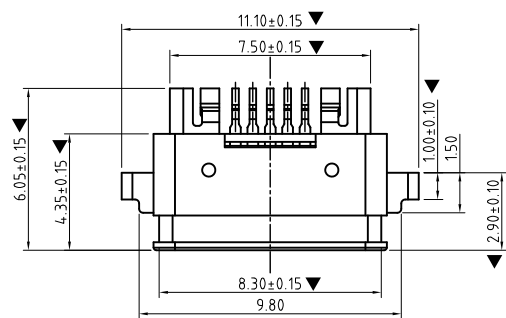

品赞科技® b-Switch		G-Switch Electronic Technology CO.,Ltd.		
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN 陈锋枫	DATE 2016.05.29	TITLE:	
	CHECKED	DATE	GT-USB-6009	
	APPROVED	DATE		
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	