
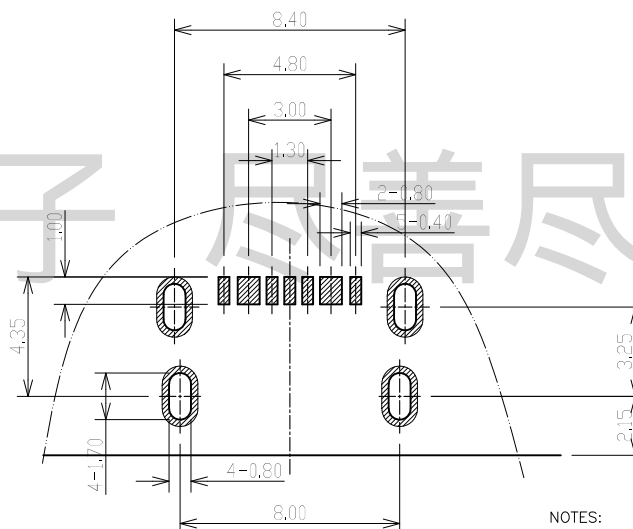
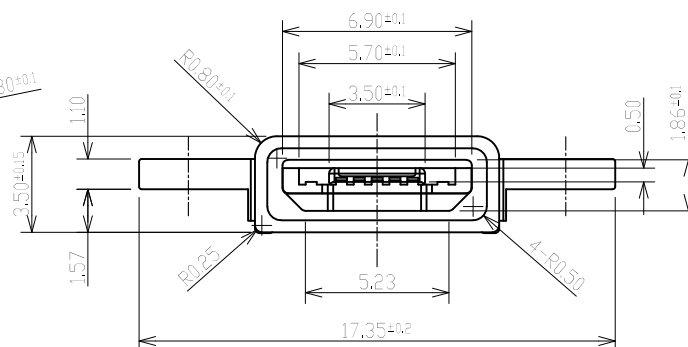


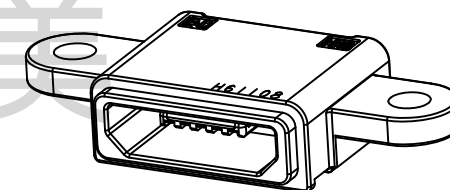

1. CONTACT CURRENT RATING: 1.0A(SIGNAL PIN2,3,4);2.0A(POWER PIN1,5).
2. CONTACT RESISTANCE: 30mΩ MAX.;
3. INSULATION RESISTANCE: 1000MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 100V AC MIN.;
5. DURABILITY: 10,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 25N (2.55Kgf)MAX.;
7. CONNECTOR UNMATING FORCES: 2~25N (0.20~2.55Kgf);

b-Switch 品贊科技®

Unless otherwise specified, Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

G-Switch Electronic Technology CO.,Ltd.

DESIGN	陈锋枫
--------	-----

DATE

DATE _____

CHECKED	DATE
APPROVED	DATE
http://www.dg-switch.com	

TITLE:

GT-USB-6012

REV.: X1

SCALE: 4:1

UNIT: mm

TEL:0769-82388879

REV:	A1
SIZE:	A4

SHEET: 1/1

