
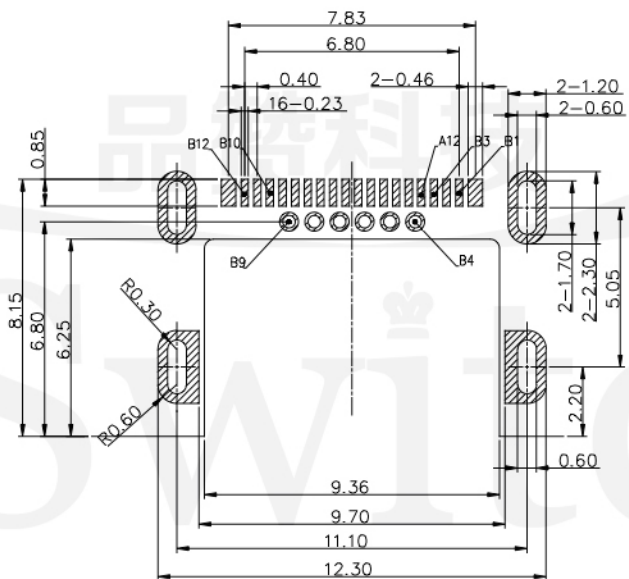
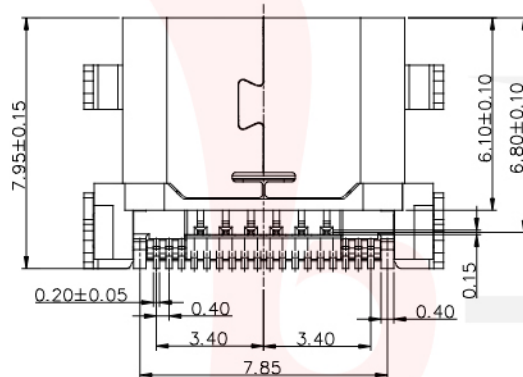
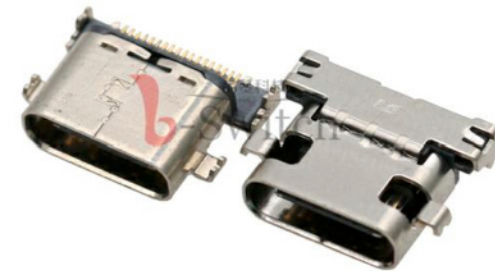
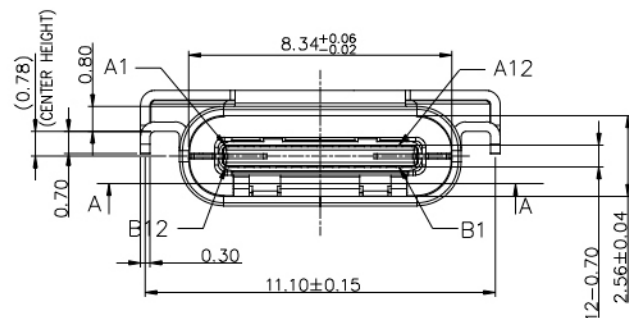
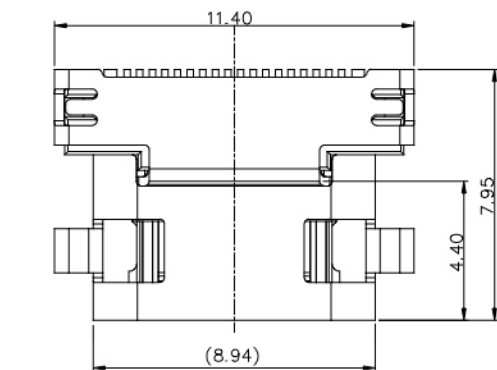



NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

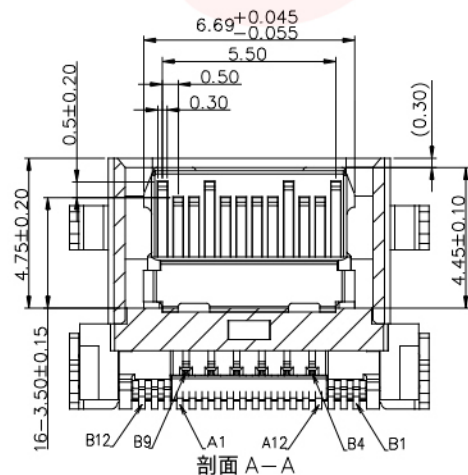

PCB LAYOUT (RECOMMENDED)

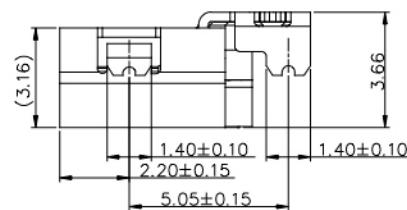(Tol: ± 0.05)

RoHS
Compliant
2002/95/EC



b-Switch 品赞科技®

Unless otherwise specified, Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

G-Switch Electronic Technology CO.,Ltd

DESIGN	FENG FENG	DATE	2018.05.29	TITLE: GT-USB-7008		
CHECKED		DATE				
APPROVED		DATE				
http://www.dg-switch.com				REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879				SIZE: A4	SHEET: 1/1	