

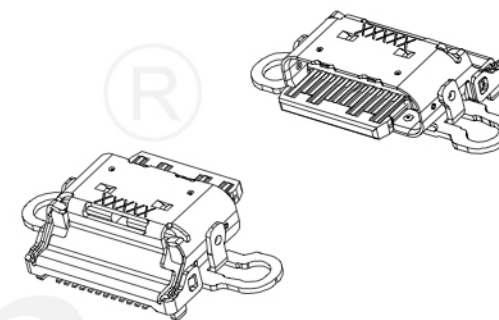
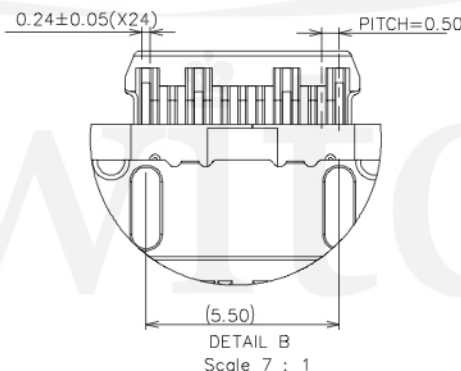
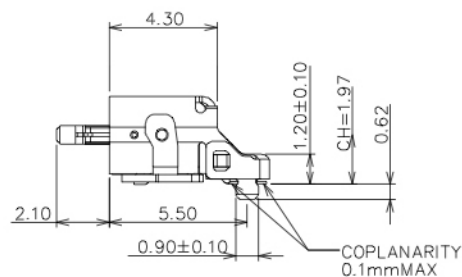
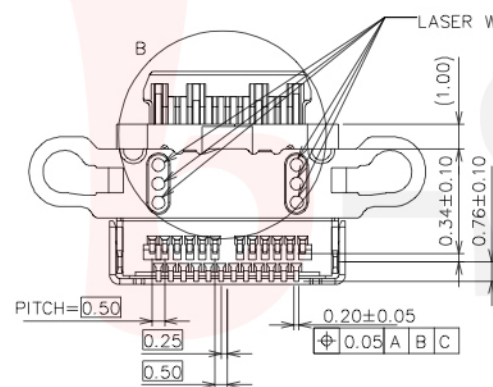


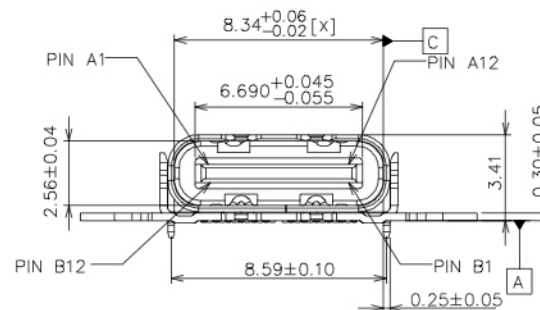

- NOTES
- 1.0 ELECTRICAL CHARACTERISTICS
 - 1.1 LOW LEVEL CONTACT RESISTANCE
INITIAL: 40mW FOR ALL CONTACT MAX
AFTER: 10mW MAX CHANGE
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE
100V AC FOR 1 MINUTE SEA LEVEL
 - 1.3 INSULATION RESISTANCE
100 MW MIN
 - 1.4 CURRENT RATING
VBUS AND GND CONTACTS RATED AT)1.25A
PARALLELED FOR A TOTAL OF 5A
 - 2.0 MECHANICAL CHARACTERISTICS:
 - 2.1 INSERTION FORCE: 5N MIN. 20N MAX.
 - 2.2 EXTRACION FORCE:
DURABILITY 1-1000 CYCLES 8N MIN. 20N MAX
DURABILITY 1001-10000 CYCLES 6N MIN. 20N MAX
 - 2.3 DURABILITY: 10000 CYCLES
 - 3.0 OPERATING TEMPERATURE: -55°C TO +85°C

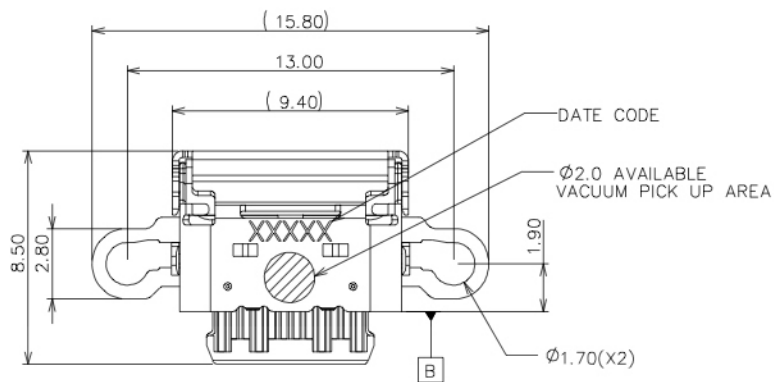


b-Switch 品赞科技®

Unless otherwise specified, Tolerance:
 X. ±0.30
 X.x ±0.20
 X.xx ±0.15
 X.xxx ±0.10
 Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN 陈锋枫	DATE 2016.05.29	TITLE:
CHECKED	DATE	GT-USB-7030
APPROVED	DATE	
http://www.dg-switch.com		REV.: X1
TEL:0769-82388879		SCALE: 4:1
		UNIT: mm
		SIZE: A4
		SHEET: 1/1

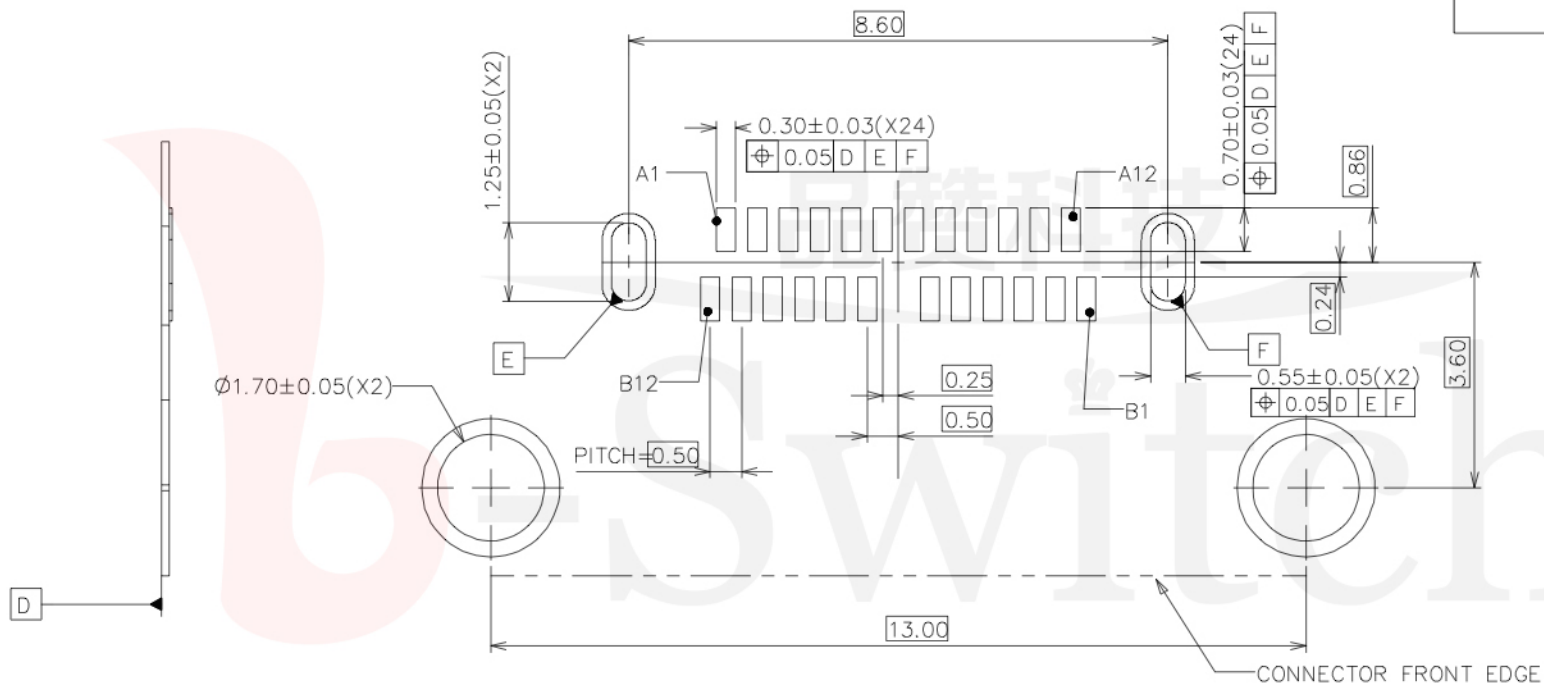

RECOMMENDED PCB LAYOUT
TOLERANCE ± 0.05



Unless otherwise specified, Tolerance:
X. ± 0.30
X.x ± 0.20
X.xx ± 0.15
X.xxx ± 0.10
Angles $\pm 3^\circ$

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN 陈锋枫	DATE 2016.05.29	TITLE: GT-USB-7030		
CHECKED	DATE			
APPROVED	DATE			
http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	

