

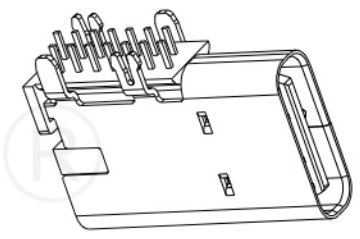


RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



- 产品要求:
- 壳子: a. 不锈钢201 T: 0.30mm
b. 电镀镍
 - 端子: a. (C1814)/铜 T: 0.20mm
b. 电镀半金锡 (3u")
 - 卡勾: a. 不锈钢301 T: 0.30mm
 - 塑胶: LCP (E130I)
 - MECHANICAL:
INSERTION: 5°~20N.
EXTRACTION: 8°~20N.
DURABILITY: 10000 CYCLES
 - ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

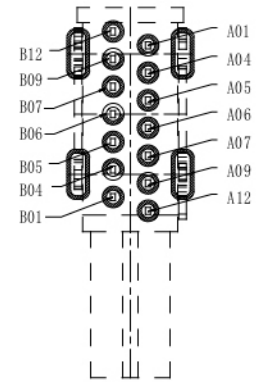

	G-Switch Electronic (HongKong) CO.,Ltd		
	DESIGN 陈锋枫	DATE 2016.05.29	TITLE: GT-USB-7036
Unless otherwise specified, Tolerance:	CHECKED	DATE	
X. ±0.30	APPROVED	DATE	
X.x ±0.20	http://www.dg-switch.com		REV.: X1
X.xx ±0.15	TEL: 0769-82388879		SCALE: 4:1
X.xxx ±0.10			UNIT: mm
Angles ±3°			SIZE: A4
			SHEET: 1/1