

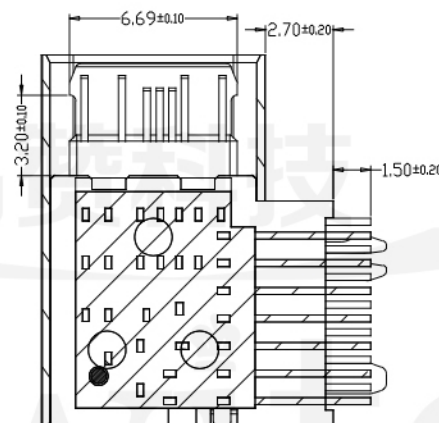





截面 2-2

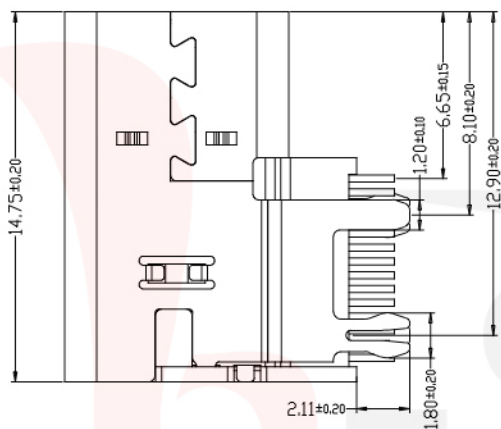

截面 3-3

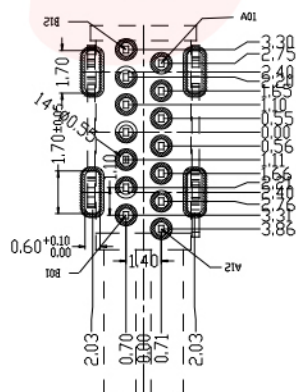

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

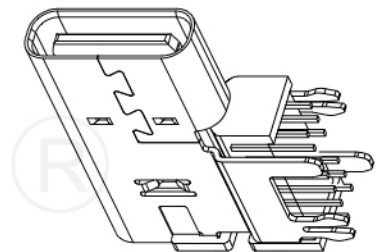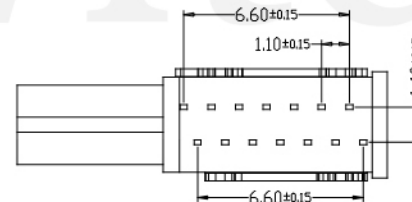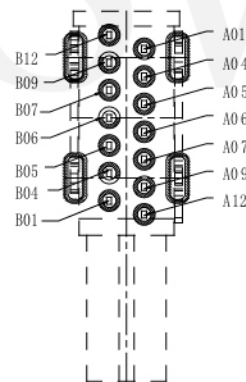

产品要求:

1. 壳子 :a. 不锈钢201 T:0.30mm
2. 端子 :a. (C1814)/铜 T:0.20mm
3. 卡勾 :a. 不锈钢301 T: 0.30mm
4. 塑胶: LCP (E130I)
5. MECHANICAL :
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES
6. ELECTRICAL :
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.



RoHS
Compliant
2002/95/EC



Unless otherwise specified, Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

G-Switch Electronic (HongKong) CO.,Ltd

DESIGN	陈锋枫	DATE	2016.05.29	TITLE: GT-USB-7037		
CHECKED		DATE				
APPROVED		DATE				
http://www.dg-switch.com				REV.: X1	SCALE: 4:1	UNIT: mm
TEL: 0769-82388879				SIZE: A4	SHEET: 1/1	