

GT-TC098X-H073-LX

G-SWITCH



Operating Force

- A=160gf
- B=250gf
- C=100gf
- D=70gf
- E=130gf
- F=320gf
- G=400gf

Switch Height
H073=7.3mm

Switch lifetime (Force)

- L05=50,000 Cycles (B, F, G)
- L1=100,000 Cycles (A, B)
- L3=300,000 Cycles (A, B, C, D, E)
- L5=500,000 Cycles (A, B, C, D, E)

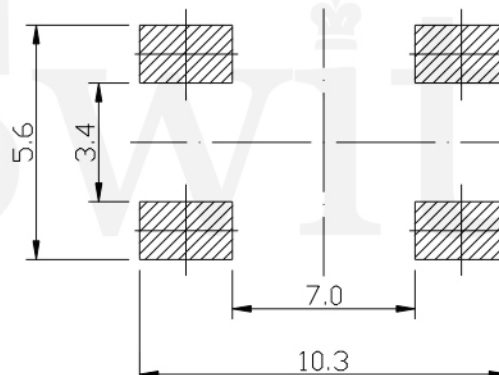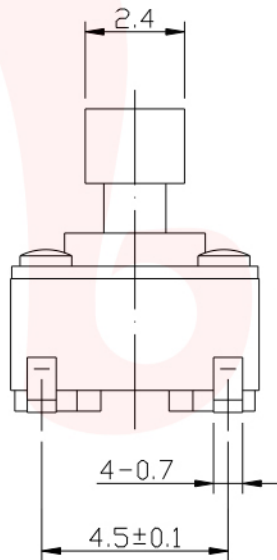

P.C.B LAND DIMENSION

G-Switch Specification:

Operating temperature range: -30°C to +85°C


Rating: 50mA, 12V DC

Insulation resistance: 100MΩ min. 100V DC

Dielectric strength: 250V AC for 1 min

Contact resistance: 100mΩ max.

Travel: 0.25±0.1mm



		G-Switch Electronic (HongKong) CO.,Ltd.				
					DESIGN 陈锋枫	DATE 2019.05.29
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°		CHECKED	DATE	GT-TC098-H073-LX		
		APPROVED	DATE			
		http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
		TEL: 0769-82388879		SIZE: A4	SHEET: 1/1	